


Type-A HDMI Test Plug Module

MA002470

- High-quality HDMI type A connector between DUT (Device Under Test) and test system
- Cutting-edge reliable, durable, and high accurate solution to replace commercial cables and connectors
- Applicable with all devices with HDMI type A receptacles
- Durability for high-volume production testing

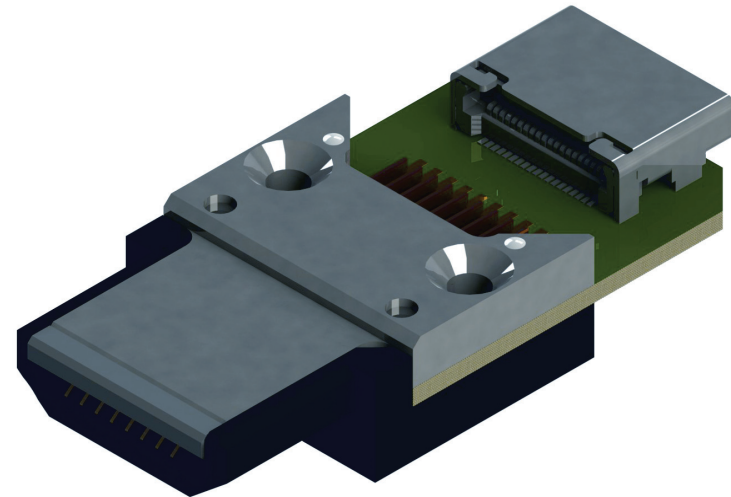

USE CASES

HDMI interface testing of devices with HDMI connectors, like PCs, laptops, TVs, digiboxes, game consols, Blu-ray players, A/V receivers, video projectors, and others.

Applicable for testing in high volume production, R&D laboratories, service centers, and test laboratories.

TECHNICAL CHARACTERISTICS

Dimensions: 35.5*16.5*10.54 mm
(1.4"*0.65"*0.42")

INTERFACE

Test interface: HDMI type A

Cable connecting interface: HDMI type C (mini)

INSTALLATION REQUIREMENTS

M2 countersunk screws, positioning pins diameter 1 mm - delivered with test module

CONTACT INFO

sales@bluelec.com

TECHNICAL DETAILS

Product is designed to meet the electrical, mechanical, and environmental performance requirements of HDMI

Environments

Temperature	from 0 °C to +60 °C
Relative humidity	from 15% to 95% non-condensing

Specification

Electrical

Rated voltage (max.)	20V AC (rms)
Rated current (max.)	0.5 A

Mechanical

Durability	50000 (typical)
Mating force (typical)	8 N
Unmating force (typical)	4 N

RoHS compliant

Lead free

