

# eSATA Test Connector

## MA019682



### ELECTRICAL

PINOUT Socket/Plug	
Pin	Name
1	GND
2	A+
3	A-
4	GND
5	B-
6	B+
7	GND

CHARACTERISTICS	
Current Max.	0.4A
Voltage Max.	30Vrms
Datalines Diff. Impedance	100Ω
Operating Temperature	0°C - 60°C

### MECHANICAL

Mating force	7N (typical)
Unmating force	3N (typical)
Durability	50k cycles (typical)

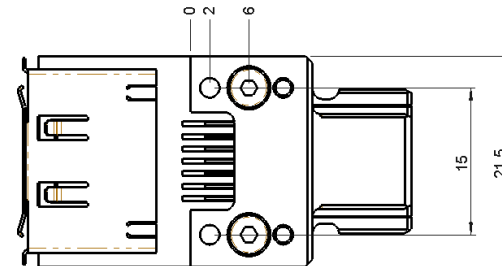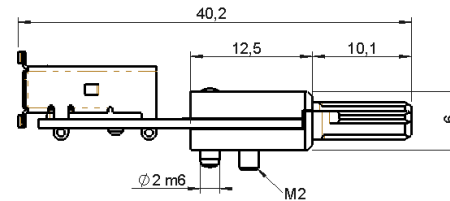

MA019682 eSATA Test Connector is a 7-pin Test Plug with straight signaling.

MA019682 Test Plug is designed for testing of eSATA interface.

The transmission of high data rates can be achieved, recommended to be verified by our customers in their applied test setup.

