

USB Mini-B Test Connector

MA090828

ELECTRICAL



PINOUT Socket/Plug	
Pin	Name
1	VBUS
2	D-
3	D+
4	ID
5	GND

CHARACTERISTICS

Current Max.	1.0 A
Voltage Max.	30Vrms
Datalines Diff. Impedance	90Ω
Operating Temperature	0°C - 60°C

MECHANICAL

Mating force	7N (typical)
Unmating force	4N (typical)
Durability	50k cycles (typical)

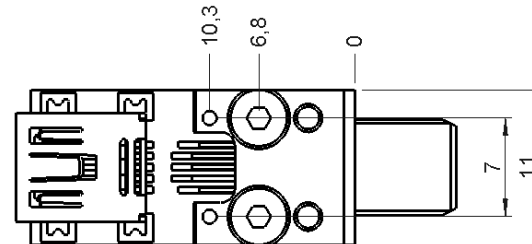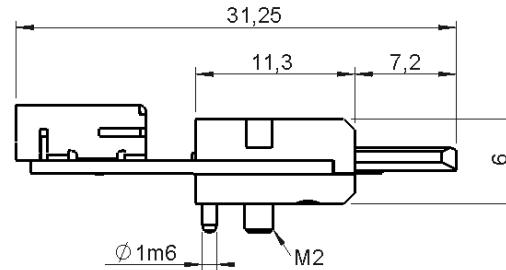

MA090828 USB Mini-B Test Connector is 5-pin connector with straight signaling. It is designed for testing of USB-Mini interface. The transmission of high data rates can be achieved, recommended to be verified by our customers in their applied test setup.

