

TOSLINK Test Connector

MA009068

The **MA009068** is a highly durable test plug for testing the optical TOSLINK connector interface. A reliable, durable and highly accurate replacement for commercial cables and connectors.

It has a TOSLINK jack with a Ø1 mm fibre cable for easy integration into the test system. Cable length is 300 mm.

Designed for production testing, product development, repair and service centres, and laboratory use.



■ OPTICAL


Interface	TOSLINK (optical)
Fibre diameter	1 mm (0.04 in)
Cable length	300 mm (11.81 in)

■ MECHANICAL

Operating temperature	0 – 60 °C
Storage temperature	–20 ... +70 °C
Relative humidity	15 – 95 % non-condensing
Compliance	RoHS

■ DIMENSIONS

mm

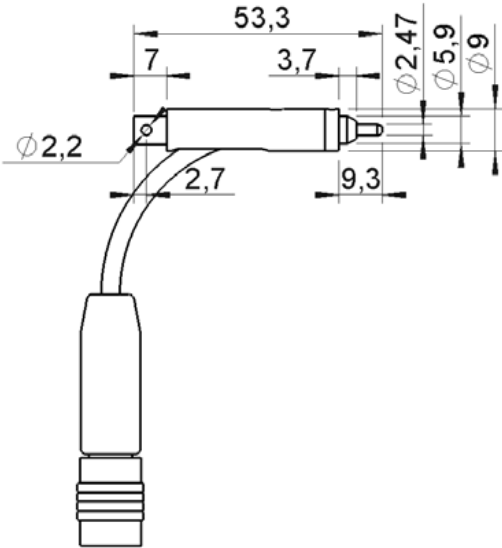

■ OPTIONAL ACCESSORIES

Float unit A float unit for this test connector is in development — contact sales@bluelec.com for availability.



3D CAD models available on request via sales@bluelec.com