

3-Axis Vibration Sensor


PCB-1348

The **PCB-1348** is a 3-axis vibration sensor developed for use with automation equipment — for example, accurate sensing of machine vibrations during automated work cycles.

It simultaneously measures acceleration on the X, Y and Z axes, providing three independent analogue outputs on a single shielded M12 connector.

The sensor mounts to the machine frame or fixture via two through-holes, and its shielded interface supports reliable signal transmission in electrically noisy environments.

Designed for automated and semi-automated production equipment.

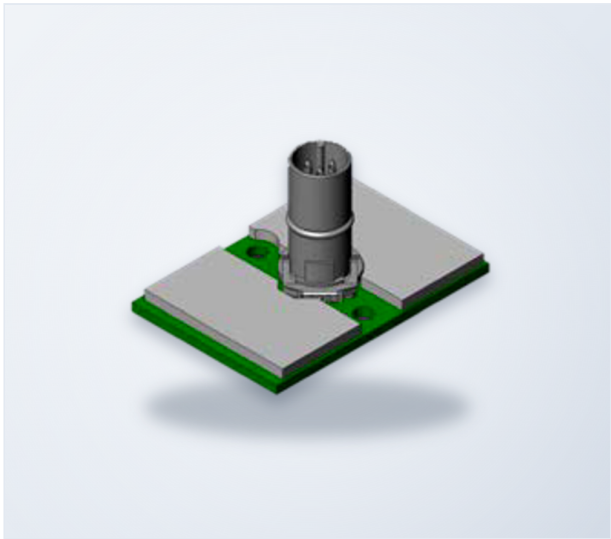

ELECTRICAL

Axes	X, Y, Z (independent)
Frequency range	1 – 200 Hz (–3 dB)
Sensitivity	2 V/g
Acceleration range	±2 g
Supply voltage	24 V
Operating temperature	0 – 50 °C
Storage temperature	–20 ... +70 °C
Relative humidity	15 – 90 % non-condensing

MECHANICAL

Body size	30 × 44 mm (1.18 × 1.73 in)
Height	22.9 mm (0.90 in)
Mounting holes	2 × Ø3.2 mm (Ø0.13 in)
Connector	M12 shielded, 5-pos. A-coded
Compliance	RoHS


PINOUT

M12 5-pos.

Pin	Signal
1	Z-OUT
2	V+
3	X-OUT
4	Y-OUT
5	GND

DIMENSIONS

mm

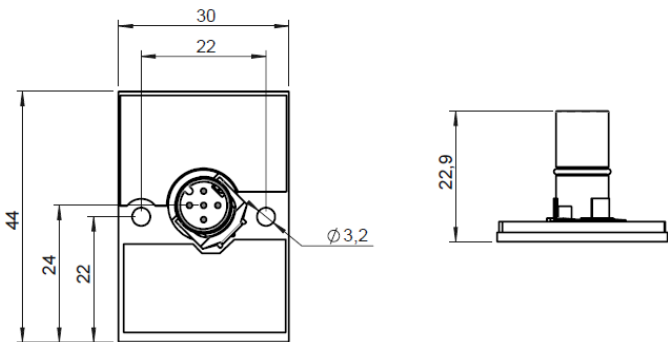

TYPICAL FREQUENCY RESPONSE

gain vs. frequency



3D CAD models available on request via sales@bluelec.com