


Type-A HDMI Test Plug Module

MA002470

- High-quality HDMI type A connector between DUT (Device Under Test) and test system
- Cutting-edge reliable, durable, and highly accurate solution to replace commercial cables and connectors
- Compatible with all devices with HDMI type A receptacles
- Durable for high-volume production testing

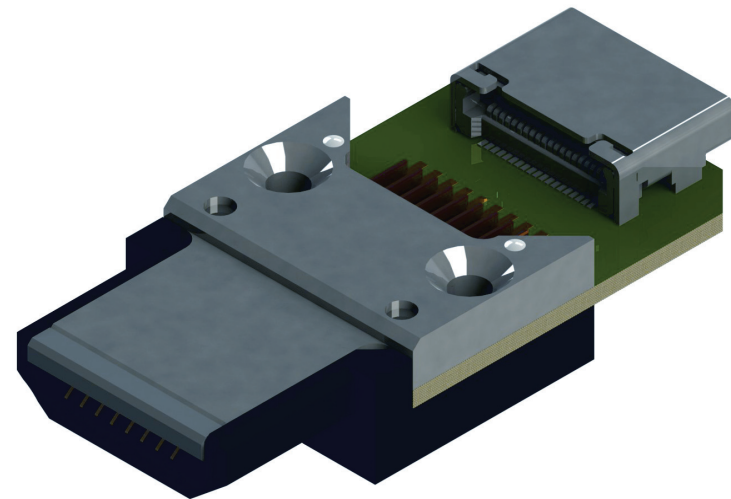

USE CASES

HDMI interface testing of devices with HDMI connectors, like PCs, laptops, TVs, digiboxes, game consoles, Blu-ray players, A/V receivers, video projectors, and others.

Suitable for testing in high-volume production, R&D laboratories, service centres, and test laboratories.

TECHNICAL CHARACTERISTICS

Dimensions: 35.5*16.5*10.54 mm
(1.4"*0.65"*0.42")

INTERFACE

Test interface: HDMI type A

Cable connecting interface: HDMI type C (mini)

INSTALLATION REQUIREMENTS

M2 countersunk screws, positioning pins
diameter 1 mm - delivered with test module

CONTACT INFO

sales@bluelec.com

TECHNICAL DETAILS

Product is designed to meet the electrical, mechanical, and environmental performance requirements of HDMI

Environments

Temperature from 0 °C to +60 °C

Relative humidity from 15% to 95% non-condensing

Specification

Electrical

Rated voltage (max.) 40V AC (rms)

Rated current (max.) 0.5 A

Mechanical

Durability 50000 (typical)

Mating force (max.) 45 N

Un-mating force (max.) 25 N

RoHS compliant

Lead free

